












Noise Barrier Composite

# FLEXI*WRAP*

Acoustic Insulation

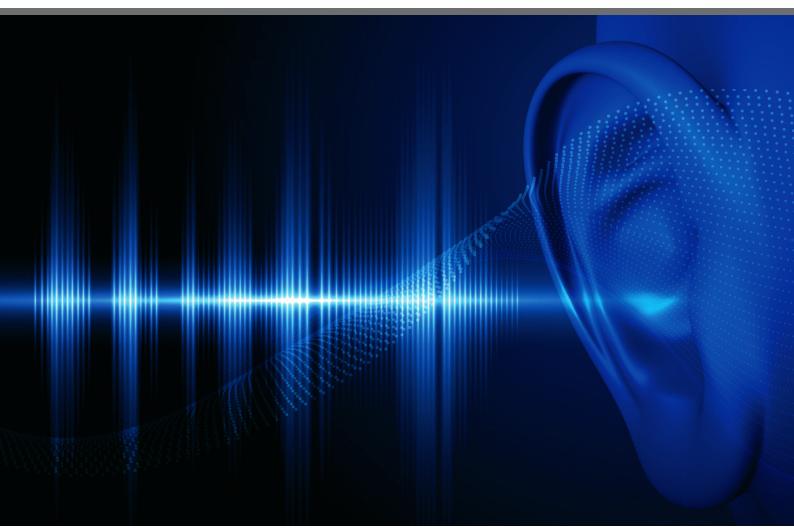


SOUNDPROOFING SOLUTIONS





FlexiWrap is a high-performance acoustic barrier, comprised of convoluted polyurethane open cell foam that is bonded to a flexible mass loaded vinyl (MLV) and covered with a foil surface made from aluminum. The material composition offers low VOC emission and high fire resistance properties as well as durability to ensure longevity of performance.

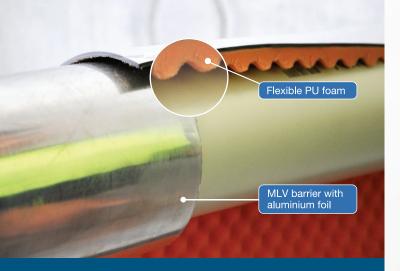

FlexiWrap is primarily used to insulate piping or equipment in both commercial and residential buildings. The product has been specifically engineered to reduce unwanted noise, in order to improve acoustic comfort in a variety of applications, by absorbing and deflecting sound vibration.



The flexibility of the material allows it to wrap effectively around external pipe and duct surfaces, to reduce or eliminate the sound waves that would otherwise travel throughout and around these systems. FlexiWrap is also effective as a sound barrier for industrial equipment including fans, motors, pumps and compressors and is available in a variety of sheet sizes, as well as pre-manufactured shapes and bends, to fit a variety of unique shapes and sizes.



FlexiWrap can easily be cut to any shape or size required, and a wide range of weights and thicknesses are available to suit your specific noise reduction requirements. For optimal performance, FlexiCell® Tape is the simple and recommended choice for joining and securing FlexiWrap, in any application.

### **PRODUCT FEATURES**

- 10 Year Manufacturer's Warranty
- ISO 9001 Quality Control Standard
- ISO 14001 Environmental Standard
- ISO 45001 Occupational Health & Safety
- Wide range of MLV weight options: 5/8/10 kg/m² (tol. ±10%)
- Pre-made shapes & bends available
- Matching FlexiCell® AL / ALR tapes available

## **PRODUCT BENEFITS**

- Superior noise reduction properties
- Highly flexible to suit a variety of applications
- Quick & easy to install
- Durable construction for longevity of performance
- Low VOC emissions

#### PRODUCT APPLICATIONS

- Water, sewerage & drainage pipes
- Industrial pipes, machinery & equipment
- HVAC ducting
- Motors, compressors & pumps
- Commercial & residential buildings
- Automotive & marine

#### **PROPERTIES**

Acoustic Performance: Use of a specially engineered flexible acoustic barrier provides excellent reduction in noise transmission. Designed to be used in multiple applications.

Durability: An aluminium foil barrier provides excellent protection to the product once installed.

Flexibility: Use of a very flexible foam, combined with an acoustic barrier. Ease of installaion in a variety of applications.



Fire Safe



Sound Barrier & Noise Control



Clean & Hygienic Products



**Environment Friendly Products** 



**Cost Saving** 



# TECHNICAL DATA

Properties	Value/ Assessment	Tested to:
Sound Transmission Class (STC)	30 dB	ASTM E413-16
Color	Silver/ Orange	
Thermal conductivity at 23 °C	0.042 W/m·K	ASTM C518
Operating temperature range (°C)	-40 °C to +100 °C	Continuous
Odour	Free from odour	ASTM C1304
Size	W: 1350 mm (±20 mm) L: 2.5 m, 3 m & 5 m (±50 mm)	
Standard weights	5 kg/m², 8 kg/m² (±10%)	
Thickness	20 mm ±3 mm	

Note: Product doesn't contain any fibres, asbestos, mercury or lead.

This information, presented by **Hira Industries**, is accurate to the best of our knowledge at the time of publication. All product data is based on average values and should be used as a general guide only. Due to the unique nature of specific applications, results may vary according to individual circumstances beyond the manufacturers control. As our products are subject to constant research and development, **Hira Industries** reserves the right to amend, modify and/or update the content of this publication at any time, without prior notice. Visit **flexicellfoam.com** for more information, technical specifications, installation guidelines and product warranty terms and conditions.